

Open Top Roll-off Containers

MODEL SPECIFICATIONS



R Model Specifications

STANDARD**

7 gauge floor...12 gauge sides

3 1/8" X 5 1/2" side braces on 36" centers (approx.)

6" X 2" X 1/4" rectangular tube long sills

4" X 3" X 1/8" tube top cap

3" structural channel cross members on 16" centers. Each cross member is gusseted & welded to the long sill

6 5/8" O.D. rear rollers (except bale style)

1 1/4" X 1/4" tarp rail

Solid steel nose cone added to the front of the long sills to reduce impact damage

Serial number welded to container

Heavy duty rear door hinges with grease fittings

ANSI approved door latch

Rear door safety chain & brackets

Rear door hinged streetside

Rear container hold downs

Greaseable wear points

Outside rail understructure

Primed & finish painted any standard Galbreath color

OPTIONS

1/4" floor...7gauge sides

6" X 2" X 3/8" extra heavy duty long sills

4" X 3" X 1/4" rectangular tube top cap

Inverted angle on top cap

10 gauge & 12 gauge roofs

6 5/8" or 10 3/4" O.D. X 8" front rollers

10 3/4" X 10" rear rollers (except bale style)

Interior gussets

Dirt shedders

Horizontal side braces

Barn doors

Deadlift, bale, and hooklift style understructures

Rear door hinged curbside

****Containers built for stock will have the following spec:**


6" X 2" X 3/16 long sills

Crossmembers are on 20" centers


3" X 2" X 11 gauge uprights

14 gauge side stakes, formed


"R" MODEL SPECIFICATIONS

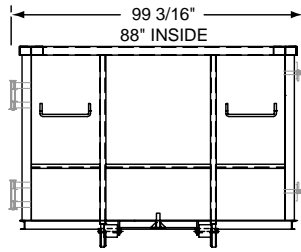

Front View

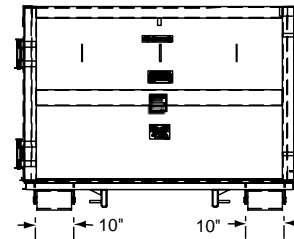

Back View

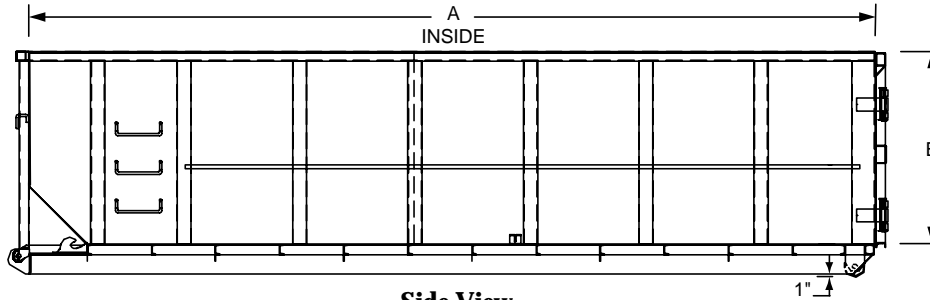

Side View

(A) For overall Length add: 12 13/16"

(B) For overall Height add: 10 1/4"

MODEL NUMBER	CAPACITY IN CU.YD.	INSIDE DIMENSIONS		APPROXIMATE SHIPPING WEIGHT		
		A	B	7 GA. FLOOR 12 GA. SIDES	1/4" FLOOR 12 GA. SIDES	1/4" FLOOR 7 GA. SIDES
R-1848	20	18'	48"	4178#	4495#	5099#
R-1860	25	18'	60"	4566#	4883#	5662#
R-1872	30	18'	72"	4909#	5226#	6171#
R-2042	20	20'	42"	4312#	4708#	5284#
R-2054	25	20'	54"	4648#	5044#	5800#
R-2066	30	20'	66"	5021#	5417#	6387#
R-2090	41	20'	90"	5821#	6217#	7521#
R-2242*	21	22'	42"	4685#	5081#	5705#
R-2248	24	22'	48"	4866#	5262#	5981#
R-2260*	30	22'	60"	5297#	5693#	6603#
R-2278*	39	22'	78"	5859#	6255#	7451#
R-2290	45	22'	90"	6246#	6636#	8038#
R-2448	26	24'	48"	5052#	5527#	6270#
R-2454	30	24'	54"	5242#	5717#	6558#
R-2472	40	24'	72"	5903#	6378#	7517#
R-2490	49	24'	90"	6551#	7026#	8393#

*Stock containers in inventory



CORPORATE HEADQUARTERS
461 E. Rosser Drive, P.O. Box 220
Winamac, IN 46996
Ph: 574-946-6631 Fax: 574-946-4579
800-285-0666

<http://www.galbreath-inc.com>

AFTERMARKET PARTS
Ph: 800-946-9476 Fax: 574-946-4579

TEXAS FACILITY
P.O. Box 530004
Grand Prairie, Texas 75053-0004
Ph: 817-477-4574 Fax: 817-473-7657
800-297-0668

ALABAMA FACILITY
Hwy 75 South, Rte. #1
Ider, Alabama 35981
Ph: 256-657-6140 Fax: 256-657-6147
800-964-6478



!CAUTION! This equipment should be operated by properly trained personnel. Operators should become familiar with OSHA, ANSI, and any other applicable standards or laws for using this equipment. Improper use, misuse, or lack of maintenance could cause injury to people and/or property. Photos used in this brochure are illustrative only. We assume no liability or responsibility for proper training/operation of equipment not manufactured by Galbreath. We reserve the right to make changes at any time without notice. Information contained within this literature is intended to be the most accurate available at time of printing.